

MODEL ACLM

MULTI COMPRESSOR


การพัฒนาอย่างต่อเนื่องด้วยเทคโนโลยีที่ทันสมัย

สำหรับเครื่องปรับอากาศแบบแยกส่วน

ที่ใช้คอนเดนซิ่งยูนิต เพียงหนึ่งเครื่อง สามารถใช้คู่กับ

แฟนคอล์ยูนิตได้ตั้งแต่ 2 เครื่องถึง 4 เครื่อง

(ขนาดบีทียรวมไม่เกิน 60,000 BTU/H)

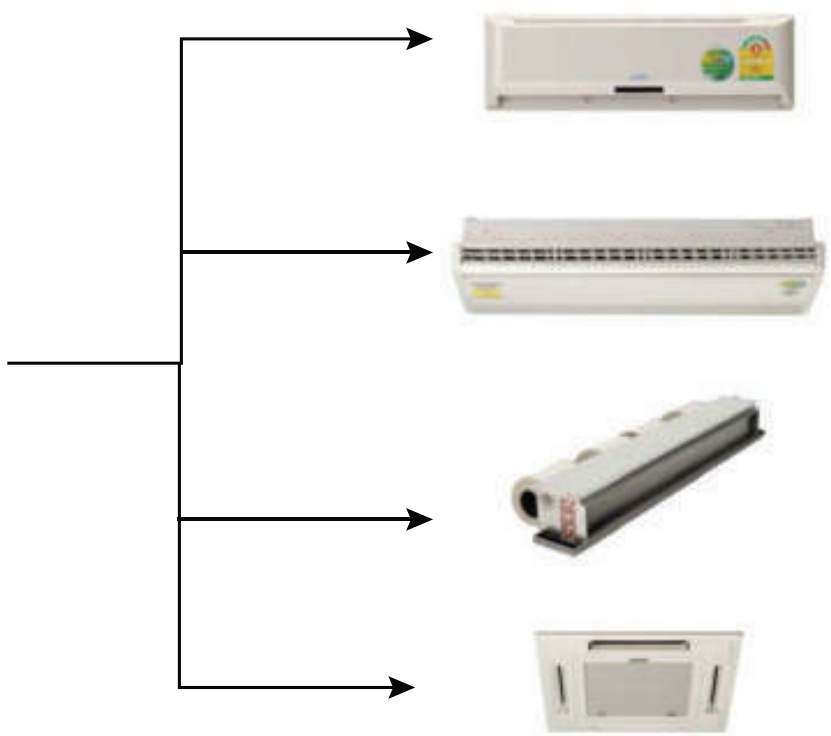



โดยแฟนคอล์ยูนิตจะแยกทำงานอย่างอิสระ (หนึ่งแฟนคอล์ยต่อหนึ่งคอมเพรสเซอร์) ทำให้ประหยัดพื้นที่ในการติดตั้งคอนเดนซิ่งยูนิต เพิ่มความสวยงามให้กับที่พักของท่านผู้อาศัย โดยสามารถเลือกใช้แฟนคอล์ยูนิตได้หลายรูปแบบไม่ว่าจะเป็นแบบติดผนัง แบบตั้งแขวน แบบฝังในฝ้าหรือแบบกระจายลมสี่ทิศทาง ตามความต้องการของลูกค้า

UNI-Aire[®]

Air Conditioning Experts

SPECIFICATION MODEL : ACLM																							
CONDENSING UNIT MODEL : ACLM			CONDENSING UNIT MODEL : ACLM																				
NOMINAL COOLING CAPACITY	BTUH		20(10+10)		30(18+12)		40(18+18)		50(24+18)		60(24+30)		80(40+40)		40(12+12+10)		50(18+12+12)		60(24+18+12)				
			9,000	18,000	12,000	18,000	18,000	24,000	18,000	24,000	30,000	40,000	40,000	40,000	12,000	12,000	18,000	12,000	12,000	24,000	18,000	12,000	
(2 CIRCUIT)																							
CONDENSING UNIT		TYPE																					
POWER SUPPLY		VOLT / PHASE / HZ																					
COMPRESSOR		ROTARY										SCROLL										ROTARY	
Q'ty		1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	
POWER INPUT (Watt)		900	1,680	1,140	1,680	1,680	2,410	1,680	2,410	2,700	3,430	3,430	1,140	1,140	900	1,680	1,140	1,140	2,410	1,680	1,140	1,140	
CURRENT (Amp.)		4.16	7.8	5.3	7.8	7.8	10.2	7.8	10.2	12.6	6.3	6.3	5.3	5.3	4.16	7.8	5.3	5.3	10.2	7.8	5.3	5.3	
TYPE		PROPPELLER FAN																					
FAN		QUANTITY																					
		1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	
MOTOR		POWER INPUT (Watt)																					
		112	193	193	193	219	219	219	219	219	193	193	193	193	193	193	193	193	193	219	219	219	
TYPE		ALUMINIUM LOUVER FIN WITH INNERGROOVE COPPER YUBE																					
CONDENSER COIL		TYPE																					
		R-22																					
REFRIGERANT		SUCTION (Inch)																					
		1/2	1/2	5/8	1/2	5/8	5/8	5/8	5/8	5/8	5/8	5/8	5/8	5/8	5/8	5/8	5/8	5/8	5/8	5/8	5/8	5/8	
CONNECTION		LIQUID (Inch)																					
		1/4	1/4	3/8	1/4	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	
DIMENSION		WIDTH (mm.)																					
		944	944	944	944	944	944	944	944	944	1,000.50	1,000.50	1,000.50	1,000.50	1,000.50	1,000.50	1,000.50	1,000.50	1,000.50	1,000.50	1,000.50	1,000.50	
WEIGHT		HEIGHT (mm.)																					
		632	835	835	1,038	1,038	1,241	1,241	1,241	1,241	1,318	1,318	1,038	1,038	1,038	1,241	1,241	1,241	1,241	1,241	1,241	1,241	
		DEPTH (mm.)																					
		410	410	410	410	410	410	410	410	410	410	410	410	410	410	410	410	410	410	410	410	410	
		(Kgs.)																					
		90	105	105	110	110	115	120	120	120	200	200	110	110	110	120	120	120	120	120	125	125	

**Eurovent certified for model DAHH only.



UNIARE CORPORATION CO., LTD.

69 Moo 3 Kingkeaw Rd., Rachatewa District, Bangplee,

Samutprakarn 10540 Thailand

Email:localsale@uni-aire.com | Email.export@uni-aire.com

Tel.+662-312-4500, www.uni-aire.com



TIS.2134

TIS.1529

Green Industry

Quality Product Manufacture by Member of The Federation of Thai Industries

THAILAND ENERGY AWARDS

PRIME MINISTER'S AWARD

Whatsapp.+666-2312-3069