



R-32



No.5



TIS.2134



TIS.1529



TIS 17025



Made in Thailand




DECOR SERIES - Cassette

Air Conditioner Model CSV/AFV

Cassette type distributed airflow all directions, including 4 colors can be matched with your styles.

DECOR SERIES

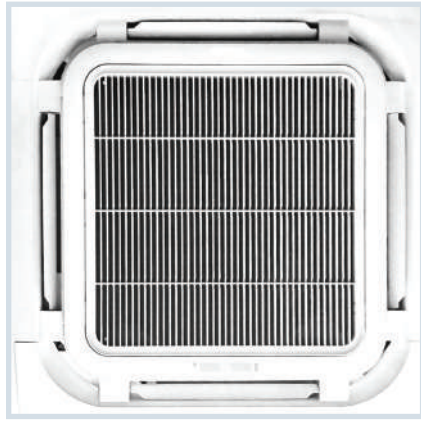


Decor-Vanilla milk-White

standard



Decor-Chacoal - Black

Options

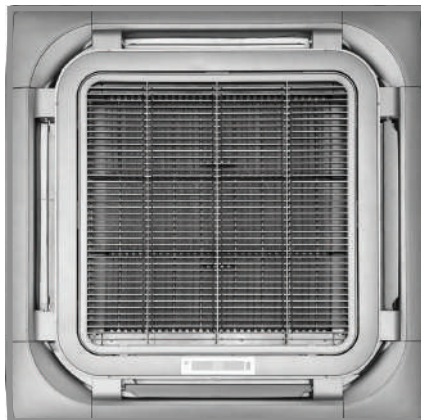

Decor-Smoky - Grey


Options




Decor-Cappuccino - Brown

Options



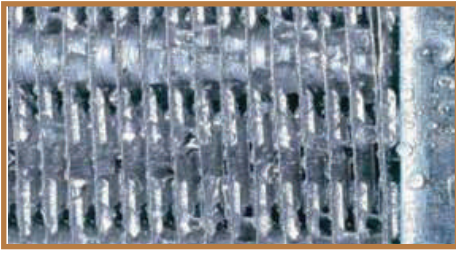

Normal aluminium fins collect dust between fin gaps, suitable for mold to grow, difficult to clean, prone to corrosion, high maintenance cost

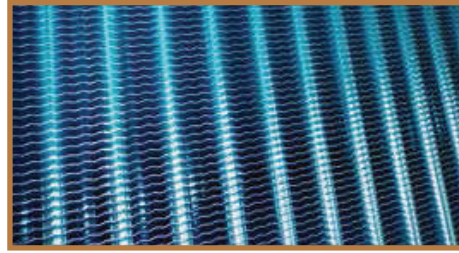

Hydrophilic Coil Blue fin coated evaporator coil provides hydrophobic property for bad odor and mold reducing. Energy saving and last longer than normal fins.


Easy to clean and maintenance



Built-in high head drain pump

Standard built-in drain pumps with head height up to 500 mm, creating a ideal solution for water drainage.

Remove and install air filter screen




Push-open grill & easy cleaning of filter

The air intake grill can be easily disassembled by just push-open action, and can be still attached to the unit by 90 degree rotate angle, designed for easy maintenance and filter cleaning.



New model design

The newly designed cassette type, featured with round flow air-out directions, deliver you more comfortable feeling of air

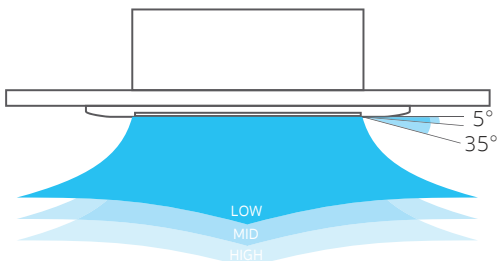

Different swing angle design

Differential swing angles to ensure comfortable feeling in anytime and anywhere.

Condensing Unit Model : AFV

Casing made from high - quality metal sheet, coated with anti - oxidation white powder coated. Durable with great heat transferred performance from advanced aerodynamic fan design. Compact size, easy installation in small space.



With International standard quality guaranteed by customers over 70 countries

SPECIFICATION MODEL : CSV / AFV

		18,100	24,900	30,260	36,292	40,150	31,700	36,044	40,010	48,200	
Nominal Cooling Capacity	(BTU/Hr)	18,100	24,900	30,260	36,292	40,150	31,700	36,044	40,010	48,200	
SEER	(BTU/Hr / Watt)	13.55	13.53	12.70	12.84	12.74	13.29	12.94	12.81	11.47	
COP	(Watt / Watt)	3.74	3.73	3.51	3.45	3.517	3.668	3.47	3.536	3.17	
Power Consumption	(Watt)	1,411	1,951	2,530	3,001	3,345	2,532	2,958	3,323	4,421	
Rated Operation Current	(Amp.)	6.57	9.00	11.91	14.23	15.48	4.75	5.37	5.92	8.04	
Power Supply	(Volt/Phase/Hz)	220/1/50					380/3/50				
EGAT CERTIFIED No.5 (มาตรฐาน เบอร์ 5)											
TIS Standard (มาตรฐาน มอก. 2134-2553)										-	
TIS Standard (มาตรฐาน มอก. 1529-2561)											
Fan Coil Unit	Model	CSV-18F	CSV-25F	CSV-30F	CSV-36F	CSV-40F1	CSV-30F	CSV-36F	CSV-40F1	CSV-50F	
	Type	4-Way Cassette Type									
Rated Air Flow at High Speed	(CFM)	600	800	1,000	1,200	1,400	1,000	1,200	1,400	1,600	
Fan Type		Multi Blade Centrifugal Type									
Evaporator Coil Type		Aluminium Louver Fin (Hydrophilic Coated) with Inner Grooved Copper Tube									
Expansion Device Type		Capillary Tube									
Control Type		Wireless Remote Control									
Air Filter Type		Washable PP. Net									
Drain Connection	(Inch)(OD)	3/4									
Body Dimension (W x L x H)	(mm.)	830 x 830 x 230			830 x 830 x 290						
Body Weight	(kgs.)	37		50		51		50		51	
Panel Dimension (W x L x H)	(mm.)	950 x 950 x 40									
Panel Weight	(kgs.)	7									
Sound Pressure Level (H/M/L)	(dB(A))	48/46/42	50/48/44	48/46/42	52/48/45	52/48/45	48/46/42	52/48/45	52/48/45	56/54/52	
Condensing Unit	Model	AFV-18FBS	AFV-25FL	AFV-301FBS	AFV-361FBS	AFV-401FBS	AFV-303FBS	AFV-363FBS	AFV-403FBS	AFV-503FBS	
	Type	Horizontal Air Flow									
Fan Type		Propeller Fan									
Condenser Coil Type		Aluminium Louver Fin with Inner Grooved Copper Tube									
Compressor Type		Rotary								Scroll	
Refrigerant Type		R-32 (Fully Charge)								R-32 (Holding Charge)	
Pipe Connection	Suction Line	(Inch)(OD) 5/8			3/4						
	Liquid Line	(Inch)(OD) 3/8				1/2	3/8			1/2	
Dimension (W x D x H)	(mm.)	804 x 330 x 530	944 x 330 x 632	944 x 380 x 784		944 x 380 x 1,140	944 x 380 x 784	944 x 380 x 936	944 x 380 x 1,140		
Weight	(kgs.)	52	61	66	72	89	66	71	88	92	
Sound Pressure Level	(dB(A))	56	58	62	62	61	62	62	61	65	

Cooling capacity based on 27 °C DB. 19 °C WB air on evaporator coil and 35 °C DB air on condenser. Specifications are subjected to change without notice for future improvement.

**Eurovent certified for model DAHH only.



UNIAIRE CORPORATION CO., LTD.

69 Moo 3 Kingkeaw Rd., Rachatewa District, Bangplee, Samutprakarn 10540 Thailand

Email.local@uni-aire.com | Email.export@uni-aire.com

Tel.+662-312-4500, www.uni-aire.com

@uni-aire Uni-Aire WhatsApp+666-2312-3069